

LA 内螺纹感应式（双作用单活塞杆）

安装形式：LA 内螺纹感应式

压力：35MPa（特殊压力等级可定制）






内径：Φ32 Φ40 Φ50 Φ63 Φ80 Φ100

【*Φ125 Φ140 Φ160 Φ180 Φ200 Φ250 Φ280 Φ320 Φ360 Φ400 Φ450 Φ500*特殊规格】

缸体：为合金钢材质，缸体、活塞杆、均为合金钢材质调质处理；活塞杆表面镀硬铬，整体表面发黑；全套选用进口密封圈。

可选装防成套；可选位移传感器。

其他特殊应用，如：耐高温、耐低温、耐腐蚀、特殊介质等需求均可定制。

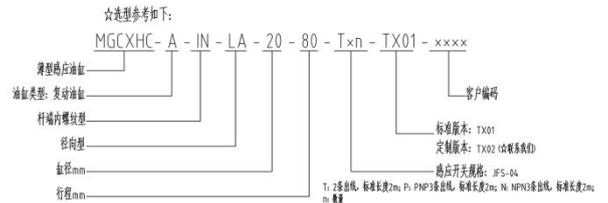

缸径	杆径D	M	Y	G	L	L1	T1	T2	T3	Z	B	B1	B2	W	N	A	A1	F1	F2
Φ32	Φ20	M12*1.75	15	G1/4"	73	29	28	12	4	24	56	25	8.6	10	10	70	56	14	9
Φ40	Φ25	M16*2	20	G1/4"	70	27	28	12	4	23	64	29	10.8	10	10	80	62	17.5	11
Φ50	Φ30	M20*2.5	24	G1/4"	75	31	29	14	4	27	74	34	13	11	10	94	74	20	14
Φ63	Φ35	M27*3	33	G1/4"	84	36	31	16	4	32	89	42	15.2	13	20	114	90	23	16
Φ80	Φ40	M30*3.5	33	G3/8"	95	38	34	16	4	41	109	52	15.2	17	25	134	110	23	16
Φ100	Φ56	M36*4	40	G3/8"	100	36	34	16	5	44	129	62	17	17	25	160	134	26	18