

基础SD内螺纹型（双作用单活塞杆）

安装形式：基础SD内螺纹型

压力：35MPa（特殊压力等级可定制）



内径：Φ32 Φ40 Φ50 Φ63 Φ80 Φ100

【*Φ20 Φ25 Φ125 Φ140 Φ160 Φ180 Φ200 Φ250 Φ280 Φ320 Φ360 Φ400 Φ450 Φ500*特殊规格】

缸体：为合金钢材质，缸体、活塞杆、均为合金钢材质调质处理；活塞杆表面镀硬铬，整体表面发黑；全套选用进口密封圈。



可选装防成套；可选位移传感器。

其他特殊应用，如：耐高温、耐低温、耐腐蚀、特殊介质等需求均可定制。

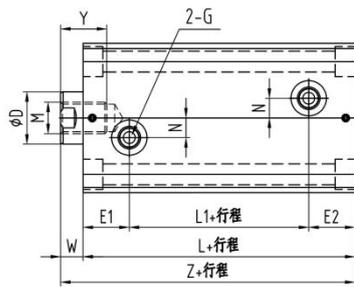

☆选型参考如下：

CXHC - A - IN - SD - 20 - 80 - TX01 - xxxxx

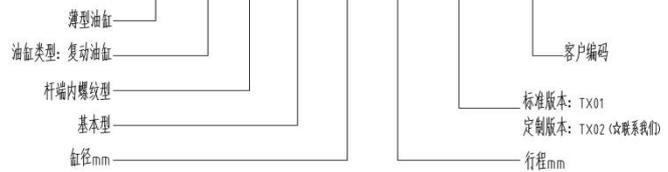

缸径	杆径D	M	Y	G	L	L1	Z	E1	E2	W	N	A	A1	T	F	H
Φ20	Φ12	M8*1.25	10	G1/8"	43	10.5	51	20.5	12	8	—	45	30	5.5	9	5.4
Φ25	Φ14	M10*1.5	12	G1/8"	45	12.5	53	20.5	12	8	—	50	36	5.5	9.5	5.4
Φ32	Φ20	M12*1.75	15	G1/4"	54	16.5	64	27	10.5	10	10	62	47	7	11	6.5
Φ40	Φ25	M16*2	20	G1/4"	55	17	65	27	11	10	10	70	52	9	14	8.6
Φ50	Φ30	M20*2.5	24	G1/4"	60	21	71	28	11	11	10	80	58	11	18	10.8
Φ63	Φ35	M27*3	33	G1/4"	70	26	83	30	14	13	10	94	69	14	20	13
Φ80	Φ40	M30*3.5	33	G3/8"	81	28	98	35	18	17	15	114	86	16	23	15
Φ100	Φ56	M36*4	40	G3/8"	88	28	105	39	21	17	15	134	102	18	26	17.5